



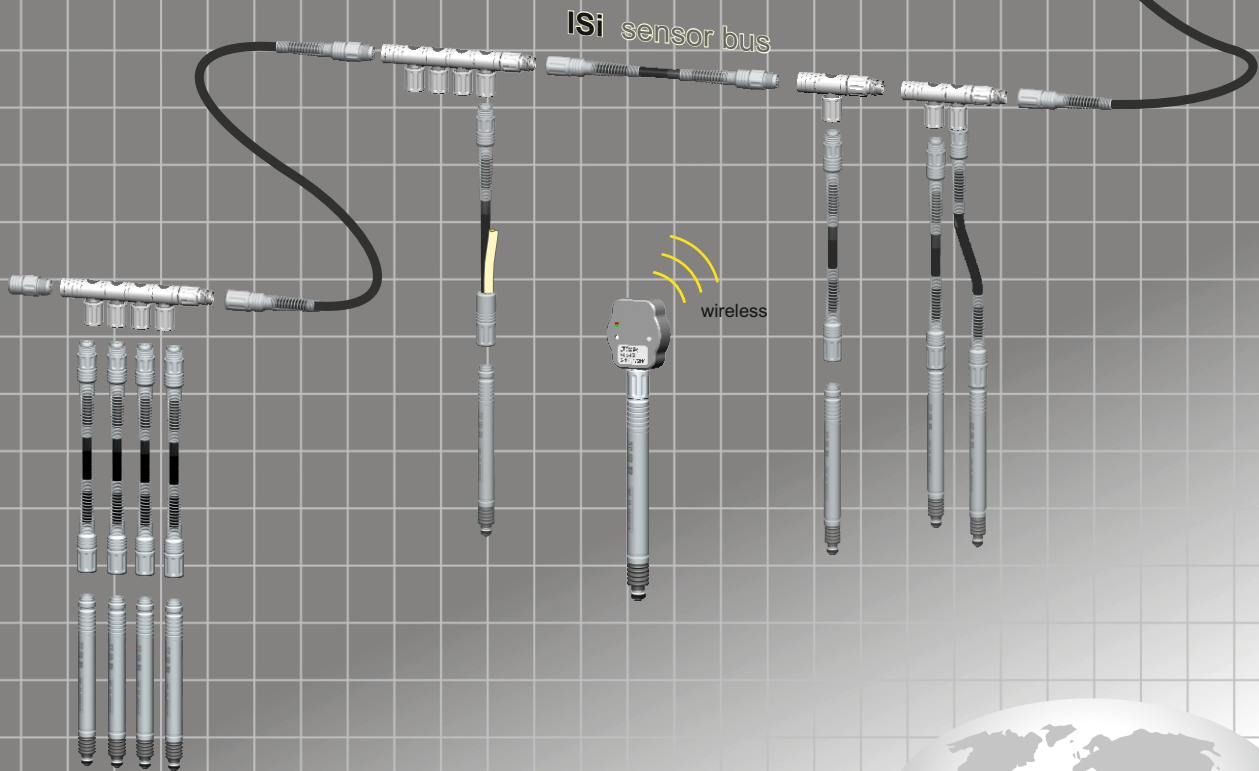

IMS
Digital Probes

CD43, CD70
Computer Displays

SD1
Sensor Display

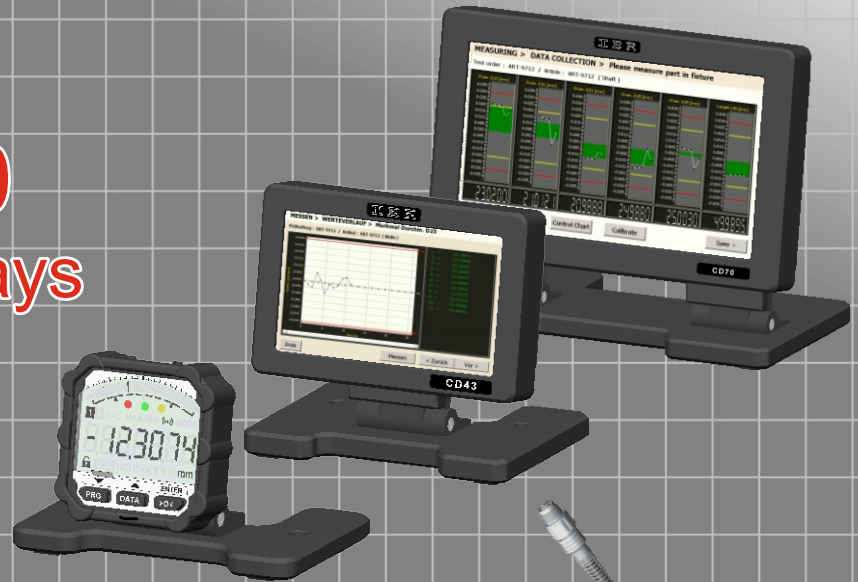

IMS Digital Probes Series

IMS probe - a new generation of inductive measuring probes with integrated signal processing and digital interface.

The new IMS measuring probes are based on the reliable clearance-free ball bearings and the robust inductive measuring principle. But the sensitive analog measuring signals are no longer transferred out of the case of the measuring probe via cables and then measured externally by electronics, instead they are processed and digitized directly inside the IMS measuring probes. An innovative measuring principle and highly integrated electronics make this milestone of new generation IMS measuring probes possible.












Comparison of ind. probes

Technical data :


	old	new
Mechanical characteristics	Standard	IMS
Compact tube case, stainless steel 8h6	✓	✓
High protection class for rough environments	✓	✓
Clearance-free ball bearing for precise mea.	✓	✓
Gauge spindle Ø 4, gauge slide M2.5	✓	✓
Actuation by spring, vacuum, compressed air	✓	✓
Cable pluggable at measuring probe for simple mounting / exchange on fixtures	(rarely)	✓
Simple extension of cables without influence on measuring values		✓
Bus cables for drastic reduction of connection cables and wiring		✓
Characteristics of integrated electronics		
Optimal stable sensor signals without influence by cable / external interferences		✓
Individual error correction of each probe		✓
Adjustment tolerance of sensitivity [%]	0.3...0.6	< 0.05
Max. linearity error (+/- 2 mm) [µm]	< 24	< 1
Temperature drift [ppm / °C]	100	20
No errors by external measuring electronics		✓
Integrated temperature measurement provides temperature of measuring probe / fixture		✓
Interface		
Simple wiring with ISi connection adapters and pluggable ISi extension cables to a bus with up to 60 probes / sensors (ISi bus)		✓
Identification of IMS measuring probes : Type, serial number, ..., next date of inspection can be requested directly from the probe		✓

Technical data : Measuring probe IMS-5S

Metrological characteristics	
Measuring range	5 mm
Resolution	0.1 µm, optional 0.01 µm
Accuracy	< +/- 1 µm
Measuring rate	1500 measuring values / sec (0.1 µm)
Measuring force	0.7 N / (optional 0.4 ... 2.0 N)
Electrical characteristics	
Supply voltage	2.7 ... 3.6 V
Power consumption	2.8 µA / measurement per second
Characteristics of integrated temperature sensor	
Measuring range	-20 °C ... 80 °C
Resolution	0.25 °C
Accuracy	+/- 1.5 °C
Environmental conditions	
Operation / Storage temp.	+32 ... +122 °F / -4 ... +158 °F

Type	Article
IMS-5S	IMS measuring probe, 5 mm measuring range, spring pushed / vacuum lifting 
IMS-5P	IMS measuring probe, 5 mm measuring range, pneumatically pushed 
ISi-cca	ISi connection cable, axial 
ISi-ccap	ISi connection cable, axial, pneumatic 
ISi-ccr	ISi connection cable, radial 
ISi-ccrp	ISi connection cable, radial, pneumatic 
ISi-ca1	ISi connection adapter, single 
ISi-ca2	ISi connection adapter, double 
ISi-ca4	ISi connection adapter, quadruple 
ISi-USB	ISi connection adapter for USB 
ISM-ISi	ISi radio module for ISM band
BLE-ISi	ISi radio module for Bluetooth BLE 

Configuration of IMS Digital Probe Series

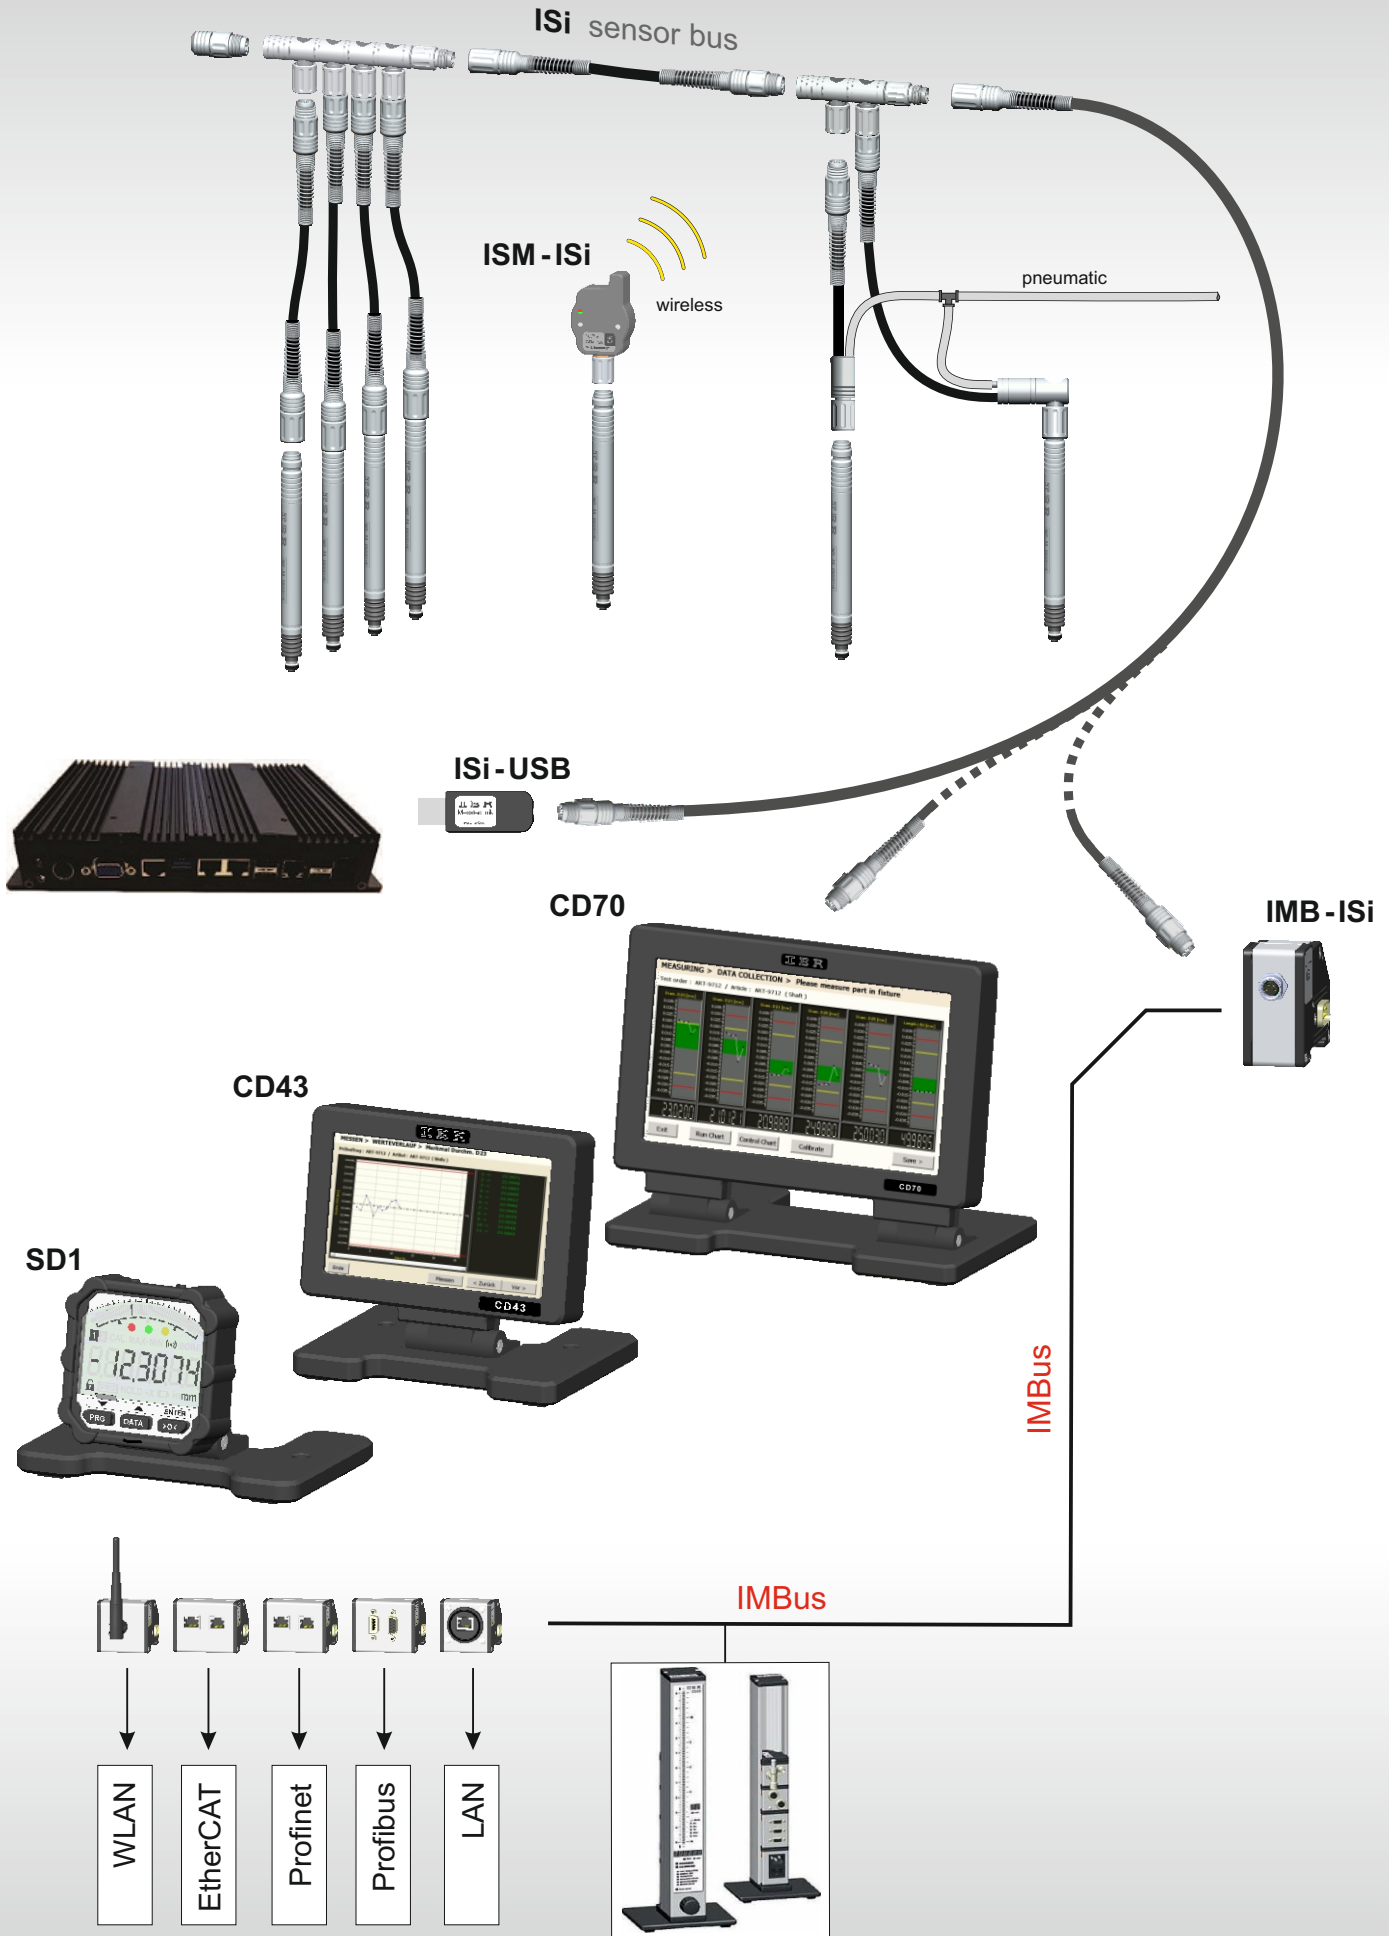

High Precision Digital Indicator SD1 - IB5

The SD1-IB5 is a high precision digital indicator, utilizing the new IMS Digital Probes with free-clearance ball bearings smooth and accurate probe travel. The digital indicator was specially designed for the roughest of industrial environments.

Type	Article
SD1-IB5	High precision digital indicator, spring pushed
SD1-IB5P	High precision digital indicator, pneumatically pushed
SD1-IB5V	High precision digital indicator with vacuum lifting

Technical data : SD1-IB5

Mechanical characteristics	
Case	Aluminium, rubber shock protection
Front plane	Acryl glass (scratch-proof coated)
Dimensions / Weight	(WxHxD) 58 x 111 x 35.5 mm / 192 g
Electrical characteristics	
Power supply	Battery (CR2032)
Battery lifetime	approx. 8000 h
Metrological characteristics	
Measuring range	5 mm
Resolution	0.1 μm , optional 0.01 μm
Accuracy	< 1 μm
Measuring rate	adjustable, 2 ... 20 values / sec
Measuring force	0.7 N (optional 0.4 ... 2.0 N)
Environmental conditions	
Operation / Storage temp.	+41 ... +113 °F / -4 ... +158 °F
Protection class	IP65 (CEI / IEC 529)
EMC according to EN50081 - 2 and EN50082 - 2	



Note :
The IB5 gage probe is fixed with 4 screws on the display for simple replacement.


Modular Digital Indicator SD1 - PH1

The SD1-PH1 is a modular digital indicator is designed to work with IMS measuring probes.

Type	Article
SD1-PH1	Modular digital indicator with changeable IMS measuring probe (spring pushed)

Technical data : SD1-PH1

Mechanical characteristics	
Case	Aluminium, rubber shock protection
Front plane	Acryl glass (scratch-proof coated)
Dimensions / Weight	(WxHxD) 58 x 111 x 35.9 mm / 165 g
Electrical characteristics	
Power supply	Battery (CR2032)
Battery lifetime	approx. 8000 h
Measuring rate	adjustable, 2 ... 20 values / sec
Measuring system	
Measuring range, resolution, accuracy, ... are defined by the connected measuring probe or sensor. Example : Measuring probe IMS-5S → Range 5mm, Resolution 0.1 μm	
Environmental conditions	
Operation / Storage temp.	+41 ... +113 °F / -4 ... +158 °F
Protection class	IP65 (CEI / IEC 529)
EMC according to EN50081 - 2 and EN50082 - 2	

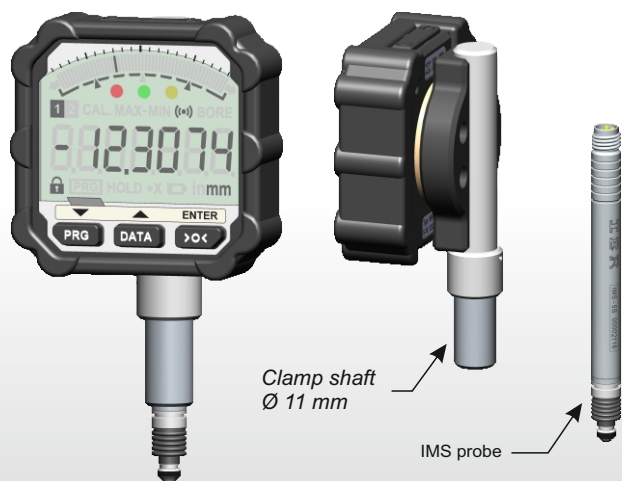

Compact Display SD1 - CC1

The SD1 - CC1 is a very efficient, powerful display with ISi-Bus interface. Due to the ISi bus, several sensors, foot and hand switches and tolerance adapters can be connected.


Technical data : SD1-CC1

Mechanical characteristics	
Case	Aluminium, rubber shock protection
Front plane	Acryl glass (scratch-proof coated)
Dimensions / Weight	(WxHxD) 58 x 58 x 32,8 mm / 149 g
Electrical characteristics	
Power supply	Battery (CR2032)
Battery lifetime	approx. 6000 h (incl. 2 probes)
Measuring rate	adjustable, 2 ... 20 values / sec
Connections	
ISi interface	Bus connection for sensors, hand / foot switch, tolerance adapter, ...
Triple-I interface	Connection for IBR radio modules or cable with USB / RS232 interface
Environmental conditions	
Operation / Storage temp.	+41 ... +113 °F / -4 ... +158 °F
Protection class	IP65 (CEI / IEC 529)
EMC according to EN50081 - 2 and EN50082 - 2	

Type

Article

SD1 - CC1	Compact display with ISi-Bus interface
SD1 - mounting bracket	Sleweable mounting bracket
SD1 - pedestal	Pedestal for compact display

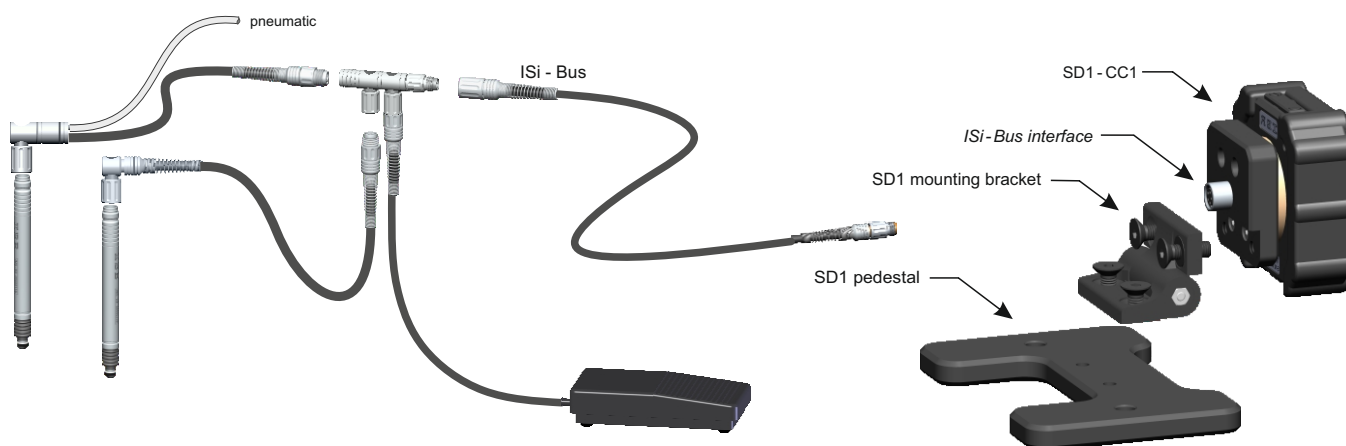

Accessories for SD1 digital Indicators and displays

Type

Article

3i - USB Triple-I connection cable for USB interface




3i - 232 Triple-I connection cable for RS232 interface



ISM - 3i Triple-I radio module for ISM band

BLE - 3i Triple-I radio module for bluetooth BLE



SD1 Universal Digital Indicator/Display

The sensor display unit **SD1** was especially developed for industrial use. The robust aluminium case with rubber shock protection as well as a high protection class allow usage in rough manufacturing environment. The display is rotatable, a numeric display shows the measuring values with high resolution and an analog display with color LEDs presents clearly the tolerance status of the component.

The sensor display SD1 features a large scope of operation and can be configured freely for the particular application as required by a windows software. Therefore functions can be removed or activated and settings can be preset.

Image : Front panel




Analog display
53 segments

Tolerance display
LEDs : ● ● ●

Numeric display
7 digits

Image : Back panel

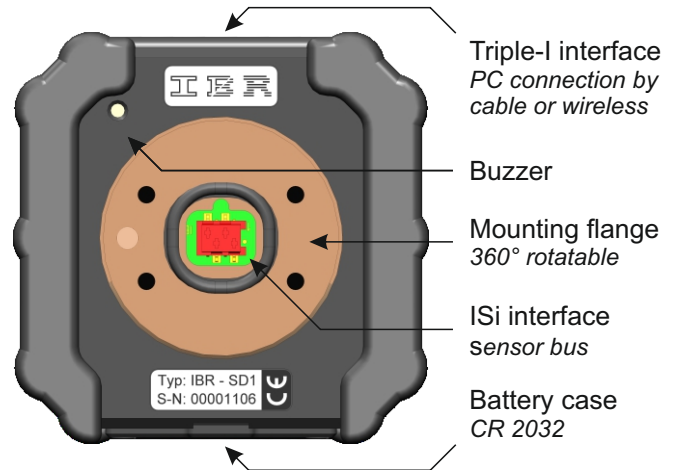

Triple-I interface
PC connection by
cable or wireless

Buzzer

Mounting flange
360° rotatable

ISi interface
sensor bus

Battery case
CR 2032

Technical data :

Mechanical characteristics	
Case	Aluminium, rubber shock protection
Front plane	Acryl glass (scratch-proof coated)
Dimensions / Weight	(WxHxD) 60 x 59.5 x 21.7 mm / 95 g
Electrical characteristics	
Power supply	Battery (CR2032)
Battery lifetime	approx. 8000 h (SD1 incl. probe)
Measuring rate	adjustable, 2 ... 20 values / sec
LCD display	
Display type	Liquid crystal display, reflective
Numeric display	7 digits (10.5 mm)
Analogue display	53 segments
LEDs / Acoustical output	
Tolerance display	3 LEDs : 1x red, 1x green, 1x yellow
Buzzer	Piezo
Connections	
ISi interface	Bus connection for sensors, hand / foot switch, tolerance adapter, ...
Triple-I interface	Connection for IBR radio modules or cable with USB / RS232 interface
Measuring systems	
Measuring range, resolution, precision, ... are defined by the connected measuring probe or sensor. Example : Measuring probe IMS-5S → Range 5mm, Resolution 0.1µm	
Environmental conditions	
Operation / Storage temp.	+41 ... +113 °F / -4 ... +158 °F
Protection class	IP65 (CEI / IEC 529)
EMC according to EN50081 - 2 and EN50082 - 2	

Software functions :



Basic functions	
Unit / Measuring direction	mm, inch / positive, negative
Resolution	0.001 / 0.0001 / optional 0.00001 mm
Measuring inputs	
Number	2
Combination by factors	±0.001 ... ±59.999 per measuring input
Measuring mode	
Static measurement	Yes / optional Hold mode
Dynamic measurement	Min, Max, TIR, Mean, Bore
Calibration	
Zero adjustment / Preset	with one master
Calibration	with two masters (gain & offset)
Forced calibration	by temperature change or elapsed time
Tolerance limits / Grading	
Tolerance type	Absolute tolerance limits or nominal size with relative tolerances
Number of grades	2 ... 30
Handling and communication	
Favorite buttons	freely definable for each button
Hand / foot switch	send measuring value, calibrate, ...
Tolerance adapter	output tolerance status / grade
Triple-I interface	measuring value output, programming
Password protection	for programming / for calibration
Configuration of analogue display	
Display mode	Bargraph / Single segment
Bargraph origin	Left / Center / Right
Special features	
Windows software for configuration of sensor display SD1	

CD70 Computer/Display for Industry


The computer display **CD70** is a compact and powerful computer/display unit for bench gage applications. The robust aluminium case as well as a high protection class allow usage in rough manufacturing environment. The new sensor interface **Isi bus** allows connection of up to 60 digital probes, sensors, hand- and foot switches. For fast and simple solving of measuring applications as well as for trend display of the production process, the CD70 is delivered with the user-friendly software **ComGage Level 1**. Optional **ComGage Level 2** is available.

Features

- Compact and robust construction with solid, sealed metal case (incl. connector caps for IP64), passive cooling and 7.0" TFT-Display (800 x 480) with touch screen, adjustable angle of tilt.
- **Isi** sensor bus for connecting 1...60 IMS probes, sensors, hand / foot switches, tolerance adapters.
- USB host (mouse, keyboard, USB stick), USB client (data exchange with PC) and LAN connection.

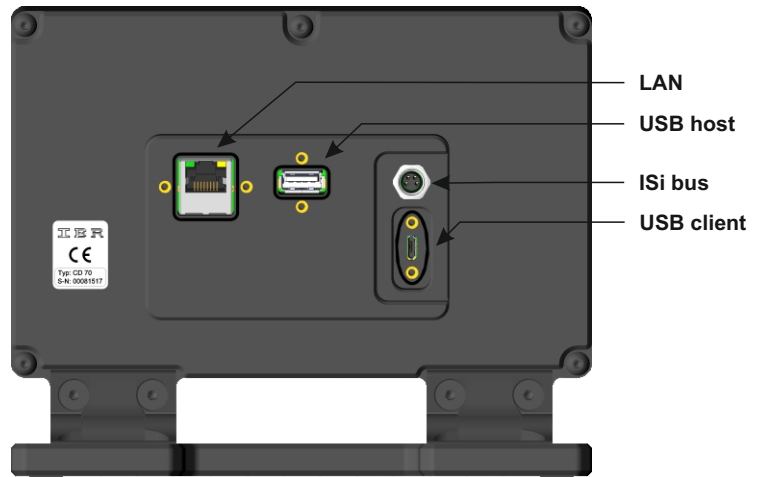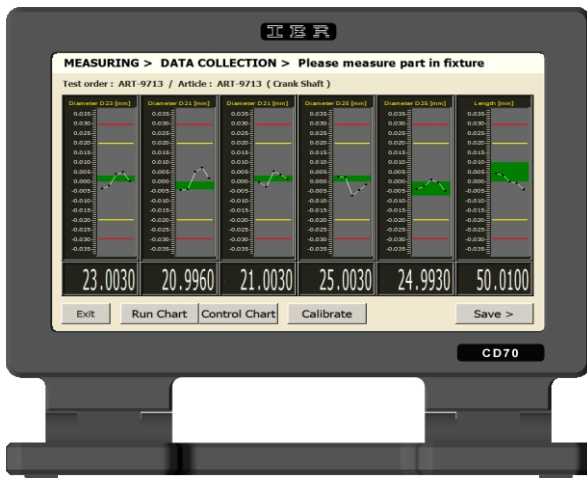

CD70 application

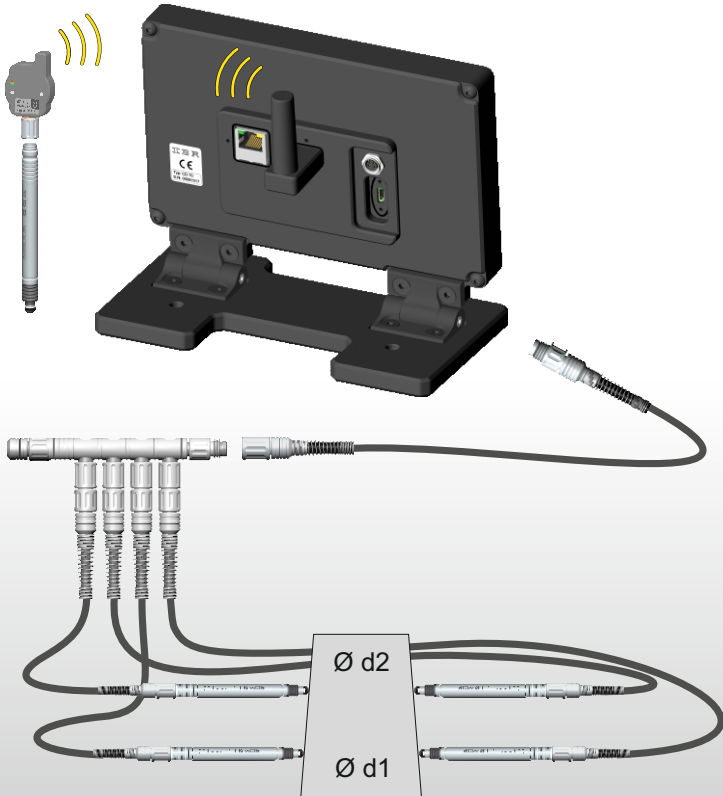

Technical data :

Mechanical characteristics	
Case with foot	Aluminium powder - coated
Dimensions / Weight	(WxHxD) 184 x 135 x 87.5 mm / 1.0kg
Protection class	Front side IP65, CEI / IEC 529
	Rear side IP64 with connector caps
Electrical characteristics	
External power supply	100 ... 240 VAC, 6 Watt
Max. power consumption	2.4 Watt (without sensors)
Computer characteristics	
Display	7.0" TFT, resolution 800 x 480 (adjustable angle of tilt)
Touch Screen	4- wire analogue resistive
CPU	Vybrid VF50, 400 MHz
Memory	128 MB RAM, 128 MB Flash
Operating system	Windows CE 6
Measuring software	ComGage Level 1 / ComGage Level 2
Connections	
Standard PC connections	1x USB client, 1x USB host, 1x LAN
Isi interface	60 sensors / clients
Environmental conditions	
Operation / Storage temp.	+41 ... +113 °F / -4 ... +158 °F

CD43 Computer/Display for Industry



The computer display **CD43** is a small and powerful computer/display unit for applications suitable for bench gage applications.

The robust aluminium case as well as a high protection class allow usage in rough manufacturing environment. The new sensor interface ISi bus allows connection of up to 60 IMS digital probes, sensors, hand- and foot switches.

For fast and simple solving of measuring applications as well as for trend display of the production process, the CD43 is delivered with the user-friendly software ComGage Level 1.

Features


- Compact and robust construction with solid, sealed metal case (incl. connector caps for IP64), fanless cooling and 4.3" TFT-Display (480 x 272) with touch screen, adjustable angle of tilt.
- ISi sensor bus for connecting 1...60 IMS probes, sensors, hand / foot switches, tolerance adapters.
- USB host (mouse, keyboard, USB stick) and USB client (data exchange with PC).

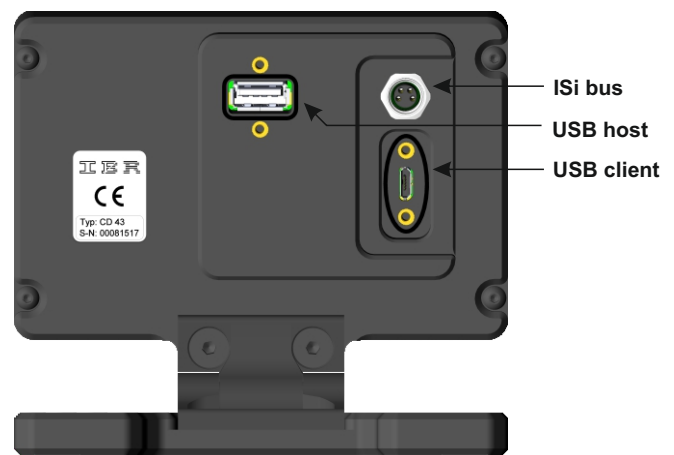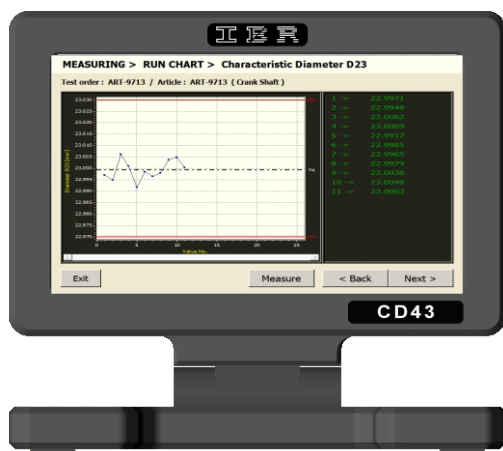

Technical data :

Mechanical characteristics	
Case with foot	Aluminium powder - coated
Dimensions / Weight	(WxHxD) 118 x 95 x 72.5 mm / 420 g
Protection class	Front side IP65, CEI / IEC 529
	Rear side IP64 with connector caps
Electrical characteristics	
External power supply	100 ... 240 VAC, 6 Watt
Max. power consumption	1.8 Watt (without sensors)
Computer characteristics	
Display	4.3" TFT, resolution 480 x 272 (adjustable angle of tilt)
Touch Screen	4 - wire analogue resistive
CPU	Vybrid VF50, 400 MHz
Memory	128 MB RAM, 128 MB Flash
Operating system	Windows CE 6
Measuring software	ComGage Level 1
Connections	
Standard PC connections	1 x USB client, 1x USB host
ISi interface	60 sensors / clients
Environmental conditions	
Operation / Storage temp.	+41 ... +113 °F / -4 ... +158 °F

CD43 application

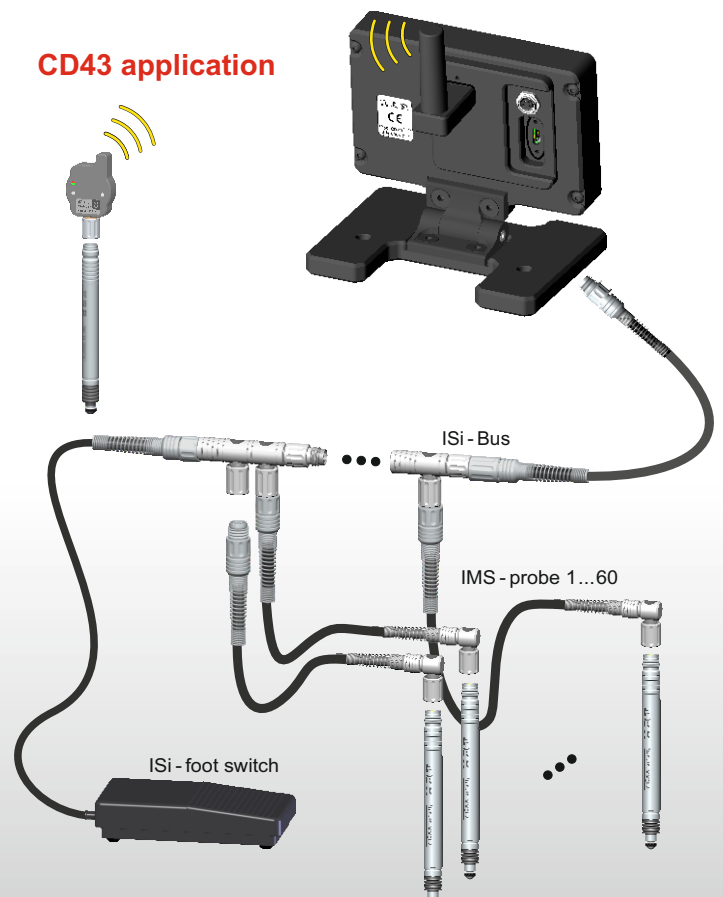

ComGage Level 1 / Level 2 Gaging Software

ComGage Level 1 and Level 2 Gaging Software are universal gaging software packages designed for ease-of-use and quick file configuration by user. The software is also available for PC use, although optimized especially for use by the CD43 and CD70 Computer/Displays with touchscreen operation.

Features

	ComGage Level 1	ComGage Level 2
Number of characteristics / Number of measuring inputs	8 / 60	20 / 60
Measurement of characteristics in freely definable groups with additional input of operator instructions	✓	✓
Input of formula for probe mixing (Support of all arithmetical and trigonometrical functions)	✓	✓
Static measuring mode with live display, as well as dynamic measuring modes : Min, Max, TIR, Mean, ...	✓	✓
Input of measuring value by touch / keyboard	✓	✓
Export functions for collected measuring values	xls, csv	xls, csv, QDAS
Reference information data input together with measuring values (Operator, Machine, ...)		✓
Trend display for collected measuring values (= run chart)	✓	✓
Statistical analysis by control charts, histograms, Cp/Cpk		✓
Control tasks by digital inputs / outputs as well as measuring value output via RS232 / radio modules	simple	advanced
Compatible to ComGage Professional	✓	✓

Image : Programming of characteristics

Select characteristic parameter group

Programme characteristic parameters

Image : Windows for data collection (Test sequence)

MEASURING > DATA COLLECTION > Please measure part in fixture
Test order : ART-9713 / Article : ART-9713 (Crank Shaft)

MEASURING > DATA COLLECTION > Please enter weight of part
Test order : ART-9713 / Article : ART-9713 (Crank Shaft)

MEASURING > Confirm measuring data of part
Test order : ART-9713 / Article : ART-9713 (Crank Shaft)

Characteristic	Unit	Nominal	Tolerance	Measured Value
1 Diameter D23	mm	23.0000	0.0300 / -0.0300	23.0030
2 Diameter D21	mm	21.0000	0.0300 / -0.0300	20.9960
3 Diameter D21	mm	21.0000	0.0300 / -0.0300	21.0030
4 Diameter D25	mm	25.0000	0.0300 / -0.0300	25.0030
5 Diameter D25	mm	25.0000	0.0300 / -0.0300	24.9930
6 Length	mm	50.0000	0.0300 / -0.0300	50.0100
7 Weight	g	1200.0000	5.0000 / -5.0000	1205.1000

Description of 1st window

In the test sequence 6 characteristics of the component are initially measured together in a measuring fixture.

The operator receives the corresponding instructions via window headline.

Description of 2nd window


In the second step of the test sequence the operator must weigh the component and enter the measuring value by touch.

Description of 3rd window


In the last step of the test sequence the operator can see a complete summary of all characteristics of the measured component and can now decide, whether the measuring values shall be stored inside the database.

ComGage Level 1 / Level 2 Gaging Software

Online -SPC windows

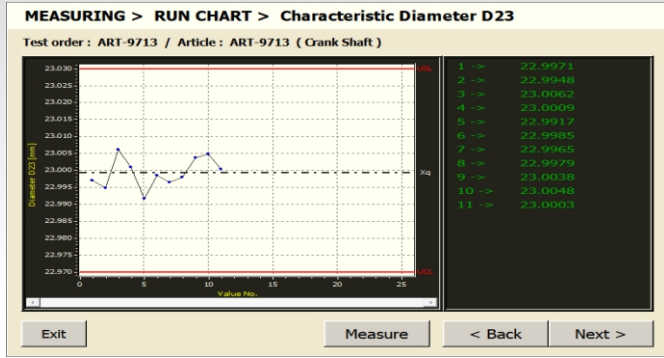


Run chart in ComGage Level 1 and Level 2

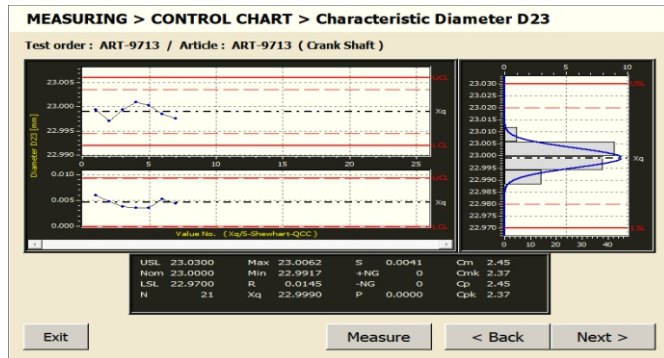

Control chart in ComGage Level 2

Programming of test schemes using ComGage Professional on PC

The ComGage Professional menu for programming test schemes allows to specify, that the new test scheme shall be executable with ComGage Level 1.

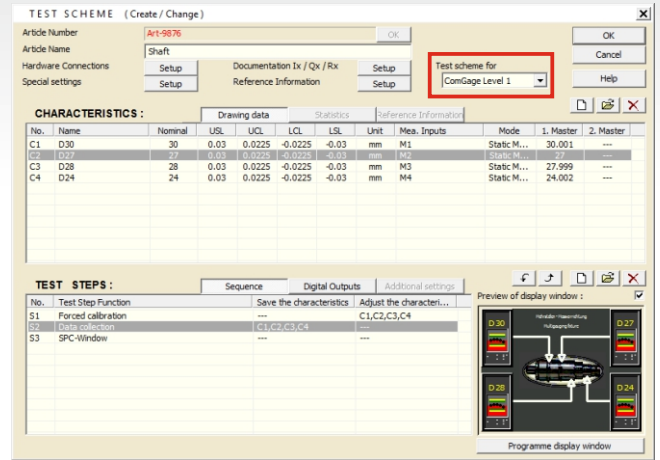

In contrast to the programming with ComGage Level 1 / 2, the programming menu of ComGage Professional allows programming of test steps with freely designable display windows and individual control of digital inputs / outputs.

For guiding the operator through the measuring sequence freely designable display windows can be created for ComGage Level 1 / 2. These display windows can contain pictures, lines and texts.


Administration, analysis and export of measured values by ComGage Professional

ComGage Professional allows creating test orders for test schemes created with ComGage Level 1 / 2. The test orders allow storage of measured data separately for production orders, production lots, ... and can be filled with measured data using ComGage Level 1 / 2.


The measured values collected with ComGage Level 1 / 2 can be exported or analysed using ComGage Professional afterwards.

Access to flash memory of CD43 / CD70 computer displays via USB

On connection of a CD43 / CD70 via USB client connector (Micro-USB) to a Windows PC, the flash memory of the CD43 / CD70 computer display can be directly accessed via Windows Mobile Device Center Software.

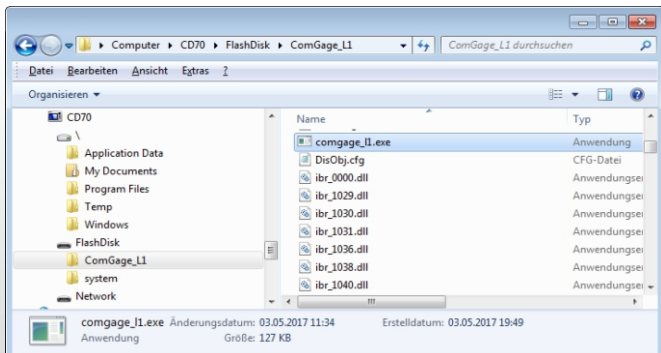

Step 1 : Add a display element

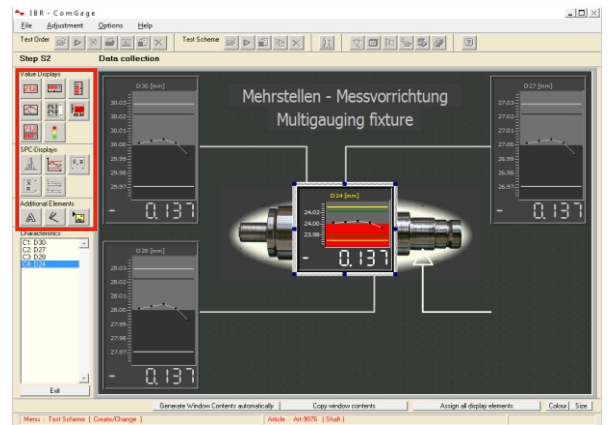

Step 2 : Place a display element

